

All *eyes* on the customer make us "the best interface"

*i*ntimacy

Connect intimately  
with our customers  
and stakeholders

*i*nnovation

Provide benefits to  
our customers  
through innovation

*i*nteraction

Enhance customer  
experience through  
positive interaction

**⚠ WARNING**

HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE

Before operating any of these products, be sure to read all related manuals thoroughly.

Failure to follow these instructions can result in death, serious injury or unintended equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
- Actual user screens may differ from the screens shown here.
- Electric equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Digital for any consequences arising out of the use of this material.
- All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
- All information contained in this catalog is subject to change without notice.

<b>Global Headquarters</b> Digital Electronics Corporation Osaka, JAPAN Tel: +81 (0)6 6208-3133 Fax: +81 (0)6 6208-3136 www.pro-face.com info@pro-face.com	<b>Americas</b> Pro-face America, Inc. Ann Arbor, MI U.S.A Tel: +1 734 477 0600 Fax: +1 734 864 7347 www.profaceamerica.com info@profaceamerica.com	<b>Taiwan</b> Pro-face Taiwan Taipei, TAIWAN Tel: +886 (0)2 2657 1121 Fax: +886 (0)2 2657 1021 www.proface.com.tw proface@proface.com.tw	<b>European Headquarters</b> Pro-face Europe B.V. Hoofddorp, THE NETHERLANDS Tel: +31 (0)23 55 44 099 Fax: +31 (0)23 55 44 090 www.proface.eu info@proface.eu	<b>France</b> Pro-face France S.A.S. Mitry-Mory, FRANCE Tel: +33 (0)1 60 21 22 91 Fax: +33 (0)1 60 21 22 92 www.proface.fr info@proface.fr	<b>Poland</b> Pro-face Europe B.V.(Warsaw Office) Warszawa, POLAND Tel: +48 (22) 511 83 28 Fax: +48 (22) 511 82 02 www.proface.pl info@proface.pl
<b>Australia and New Zealand</b> Pro-face Australia New South Wales, AUSTRALIA Tel: +61 1300-369-233 Fax: +61 1300-369-288 www.pro-face.com.au pfau@pro-face.com	<b>Singapore</b> Pro-face Singapore TechPoint, Singapore Tel: +65-6832-5533 Fax: +65-6415-1605 www.proface.sg info@proface.sg		<b>Austria</b> Pro-face Europe B.V.(Austria Office) Hagenberg, AUSTRIA Tel: +43 7236 3343 620 FAX: +43 7236 3343 629 www.proface.at info@proface.at	<b>Germany</b> Pro-face Deutschland GmbH Solingen, GERMANY Tel: +49 (0)212 258 260 Fax: +49 (0)212 258 2640 www.proface.de info@pro-face.de	<b>Spain and Portugal</b> Pro-face España Barcelona, SPAIN Tel: +34 (0)93 846 07 45 Fax: +34 (0)93 845 48 68 www.proface.es info@proface.es
<b>China</b> Pro-face China International Trading Co., Ltd. Shanghai, P.R. CHINA Tel: +86 (0)21 6361 5175 Fax: +86 (0)21 6361 5176 www.proface.co.cn proface@proface.com.cn	<b>Thailand</b> Pro-face Thailand Bangkok, THAILAND Tel: +66 (0)2 617 5678 Fax: +66 (0)2 617 5688 www.proface.co.th pfsales@proface.co.th		<b>Belgium</b> Pro-face Europe B.V.(Belgium Office) Brussels, BELGIUM Tel: +32 (0) 2 373 75 02 (NL) Tel: +32 (0) 2 373 75 01 (FR) FAX: +31 (0) 23 55 44 090 www.proface.be info@proface.be	<b>Italy</b> Pro-face Italia S.p.a. Bovisio Masciago (Milano), ITALY Tel: +39 (0)362 59 96 1 Fax: +39 (0)362 59 96 69 www.proface.it info@proface.it	<b>Switzerland</b> Pro-face Schweiz GmbH Regensdorf, SWITZERLAND Tel: +41 (0)43 343 7272 Fax: +41 (0)43 343 7279 www.proface.ch info@proface.ch
<b>India</b> Pro-face India Bangalore, INDIA Tel: +91 80 4333 3540/3541 Fax: +91 80 4333 3222 www.proface.co.in sales.proface@proface.co.in	<b>South Korea</b> Pro-face Korea Co., Ltd. Seoul, SOUTH KOREA Tel: +82 (0)2 2630 9850 Fax: +82 (0)2 2630 9860 www.proface.co.kr proface@proface.co.kr		<b>Denmark and Sweden</b> Pro-face Northern Europe ApS Roskilde, DENMARK Tel: +45 70 22 01 22 Fax: +45 70 22 01 33 www.proface.dk info@proface.dk	<b>The Netherlands</b> Pro-face Europe B.V.(Netherlands Office) Hoofddorp, THE NETHERLANDS Tel: +31 (0)23 55 44 094 Fax: +31 (0)23 55 44 090 www.proface.nl info@proface.nl	<b>United Kingdom</b> Pro-face UK Ltd Coventry, ENGLAND Tel: +44 (0)2476 847655 Fax: +44 (0)2476 847660 www.proface.co.uk info@proface.co.uk

GP4000 SERIES







## Enhanced Visibility

All models employ 65,535-color TFT LCDs with enhanced backlight brightness control. Crisp screens improve monitoring quality and safer operation.



## Mobile Remote Monitoring

Remotely monitor large-sized or long-distance applications, large process systems, or multiple machines on a manufacturing site on an easy-to carry iPhone, iPad, iPod touch, Android smartphone or Android tablet.



## Multiple Standards support a variety of Applications


Coated components and compliance with a variety of international standards enable use in a diverse range of environments.



CCS Ship Classification is also supported.


## Remote Data Collection and Management

A data management system, built with Pro-Server EX software for production quality and efficiency through HMI units installed on production machines can be simply and cost-efficiently built with standard PC software, such as Microsoft Office and SQL.

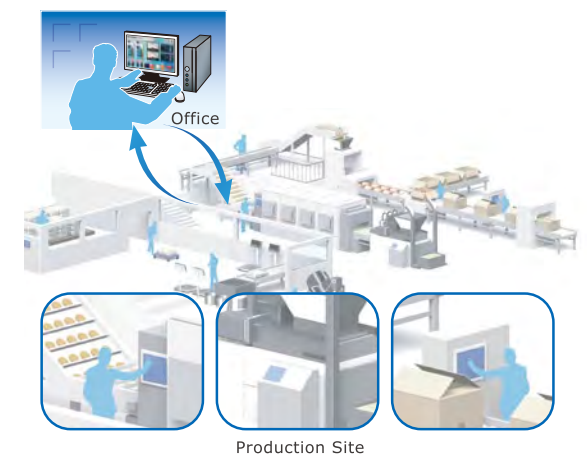


## Easy Troubleshooting

Alarm Analysis Function gives you timely understanding of error causes on site. With only a few clicks for configuration, you can set alarm analysis screens with logged status data of the alarm-related device.

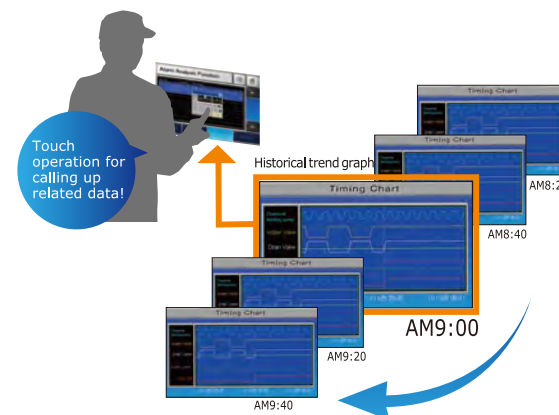





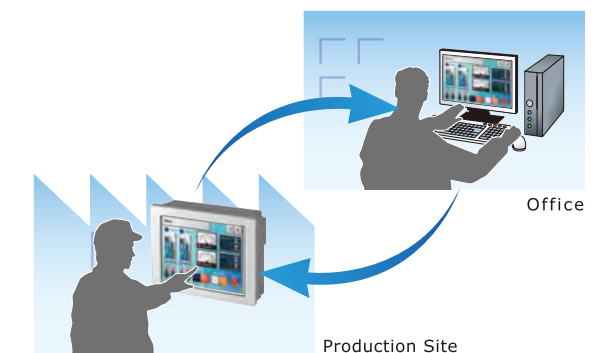





## Remote Monitoring

The Remote Monitoring software, GP-Viewer EX, allows you to monitor HMI screens installed on the production site from a Windows PC in a remote location.




Lineup







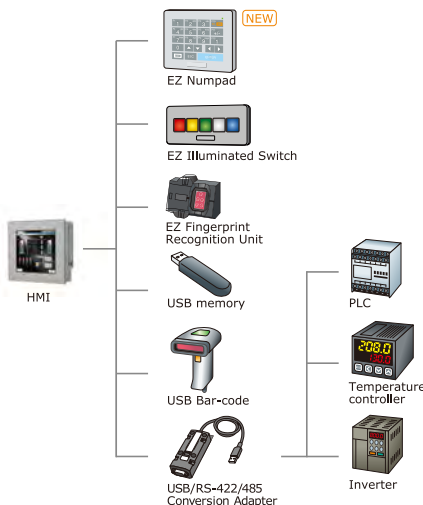









Standard Model	12.1" <small>AC 100-240V DC 24V</small>	10.4" <small>AC 100-240V DC 24V</small>	7.5" <small>DC 24V</small>	5.7" <small>DC 24V</small>	3.5" <small>DC 24V</small>
	GP-4601T / GP-4603T <small>(Isolated SIO model)</small>	GP-4501T / GP-4503T <small>(Isolated SIO model)</small>	GP-4401T	GP-4301T / GP-4303T <small>(Isolated SIO model)</small>	GP-4201T / GP-4203T <small>(Isolated COM SIO model)</small>
					
					
	Color variation	Color variation	Color variation	Color variation	Color variation
Display (Resolution)	65,536-color TFT (SVGA 800 x 600 pixels)		65,536-color TFT (VGA 640 x 480 pixels)		65,536-color TFT (QVGA 320 x 240 pixels)
Touch Panel Type	Analog or Matrix (Support Two-Point Touch)			Analog	
Memory	32MB (Application), SRAM320KB (Backup for HMI), SRAM64KB (Backup for Control)			16MB (Application), SRAM320KB (Backup for HMI), SRAM64KB (Backup for Control)	
Ethernet	x1 (IEEE802.3i / IEEE802.3u, 10BASE-T/100BASE-TX)			x1 (IEEE802.3i / IEEE802.3u, 10BASE-T/100BASE-TX)	
SIO	RS-232C×1, RS-422/485×1			RS-232C×1, RS-422/485×1	
SD Card Slot (Max. 32GB)	x 1			x 1	
USB	USB Type-A (2.0) x 1, USB mini-B (2.0) x 1			USB Type-A (2.0) x 1, USB mini-B (2.0) x 1	
Replaceable Battery	Yes			Yes	
Alarm Analysis DB Function	Yes			Yes	
Other models	Coated model: Yes / Color variation: Yes / Rear-mount model: Yes (Except GP-4603T, GP-4503T)			Coated model: Yes / Color variation: Yes / Rear-mount model: Yes (Except GP-4303T, GP-4201T and GP-4203T)	

## Easily connect multiple USB devices

A controller with serial interface, EZ Series accessory unit, bar code reader, and USB flash drive can be easily connected to the HMI unit.\*



\* EZ Fingerprint Recognition Unit also requires power supply cable.  
\* Multiple devices of the same model cannot be connected.









W Model	<div>10.4" <div>DC 24V</div></div> <div>GP-4501TW</div> <div></div> <div><div>Color variation</div><div></div></div>	<div>7.0" wide <div>DC 24V</div></div> <div>GP-4401WW</div> <div></div> <div><div>Color variation</div><div></div></div>	<div>5.7" <div>DC 24V</div></div> <div>GP-4301TW</div> <div></div> <div><div>Color variation</div><div></div></div>	<div>3.5" <div>DC 24V</div></div> <div>GP-4201TW</div> <div></div> <div><div>Color variation</div><div></div></div>			
	Display (Resolution)	65,536-color TFT (VGA 640 x 480 pixels)		65,536-color TFT (WVGA 800 x 480 pixels)		65,536-color TFT (QVGA 320 x 240 pixels)	
	Touch Panel Type	Analog				Analog	
	Memory	16MB (Application), SRAM128KB (Backup for HMI)		16MB (Application), SRAM128KB (Backup for HMI)		8MB (Application), SRAM128KB (Backup for HMI)	
	Ethernet	x1 (IEEE802.3i / IEEE802.3u, 10BASE-T/100BASE-TX)			x1 (IEEE802.3i / IEEE802.3u, 10BASE-T/100BASE-TX)		No
SIO	RS-232C×1, RS-422/485×1			RS-232C×1, RS-422/485×1			
SD Card Slot (Max. 32GB)	x 1		x 1		No		
USB	USB Type-A (2.0) x 1, USB mini-B (2.0) x 1			USB Type-A (2.0) x 1, USB mini-B (2.0) x 1			
Replaceable Battery	Yes		Yes		No (Rechargeable battery)		
Alarm Analysis DB Function	No			No			
Other models	Coated model: Yes / Color variation: Yes			Coated model: Yes / Color variation: Yes			


For detailed specifications, visit our website.  
<http://www.pro-face.com/product/hmi/gp4000/spec.html>





GP4000 SERIES  
Lineup


Modular Type Compact Type	<div>5.7" <div>DC 24V</div></div> <div>GP-4301TM Modular Type</div> <div><div>Color variation</div><div></div></div> <div></div>	<div>3.5" <div>DC 24V</div></div> <div>GP-4201TM Modular Type</div> <div><div>Color variation</div><div></div></div> <div></div>	<div>4.3" <div>DC 24V</div></div> <div>GP-411*T Compact Type</div> <div><div>Color variation</div><div></div></div> <div></div>	<div>3.4" <div>DC 24V</div></div> <div>GP-410* Compact Type</div> <div><div>Color variation</div><div></div></div> <div></div>
	Display (Resolution)	65,536-color TFT (QVGA 320 x 240 pixels)		Color LCD (480 x 272 pixels)
Touch Panel Type	Analog			
Memory	8MB(Application),nvSRAM128KB(Non-volatile,No Battery Needed)		8MB(Application), FLASH EPROM 128MB*1*2	2.2MB(Application), EPROM128KB*1*2
Ethernet	×1 (IEEE802.3i / IEEE802.3u, 10BASE-T/100BASE-TX)		×1 (IEEE802.3u, 10BASE-T/100BASE-TX) *3	
SIO	RS-232C/422/485×1		RS-232C/422/485×1*4	
SD Card Slot	No			
USB	USB Type-A (2.0) ×1, USB mini-B (2.0) ×1			
Replaceable Battery	No			
Alarm Analysis DB Function	No			
Other models	No			

Handheld Type	<b>5.7"</b> <small>DC 24V</small> <b>GP-4311HT</b> Handheld Type 	Color variation 
Display (Resolution)	65,536-color TFT (VGA 640 x 480 pixels)	
Touch Panel Type	Analog	
Memory	32MB (Application), SRAM320KB*1, SRAM64KB*5	
Ethernet	×1 (IEEE802.3i/IEEE802.3u, 10BASE-T/100BASE-TX)	
SIO	RS-232C/422/485	
SD Card Slot	×1	
USB	USB Type-A (2.0) ×1, USB mini-B (2.0) ×1	
Replaceable Battery	No	
Alarm Analysis DB Function	Yes	
Other models	No	

Modular Type HMI  
with Easy Installation

GP4000M Series  
A separate installation cable is under development.

Compact HMI with  
Full-graphic Display

GP4100 Series  
  
90.4 mm [3.56 in]  
124.9 mm [4.92 in]

Advanced Handheld  
Interface

GP4000H Series  




GP4000 SERIES

Efficient Program Development and The Perfect Visualization

GP-Pro EX Ver. 4.0 and up Features


Quickly understand detailed differences between similar project files

Project Comparison Tool allows easy yet detailed comparison of two screen-project files for updating and modifying customer applications. Differences for each part attribute, alarm message, or setup item are displayed.

Screen B1			
Parts 1	Address	X0001	X0002
	Shape	Circle	Square
	Action	Momentary	Alternate
	Label	Run	Run

Multi-version File Format Support for Screen Project Files

Screen project files edited in version 3.1 of GP-Pro EX can also be saved in version 3.0 format to facilitate screen data handling among personnel with different responsibilities such as testing engineers, factory installation technicians, and maintenance engineers.

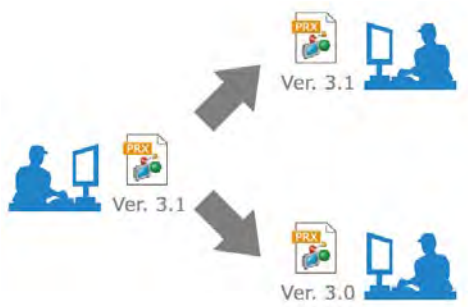

More Features

- Change password during on-line operation
- Extended text search and replacement
- Range Setting on Word Switch
- Selectable SRAM Back-up Data Modes for Screen Data Transfer

The Perfect Visualization Solution for every need.

Rear-mounting HMI,  
Integrates into Machine Design

GP4000 Series  
Rear-mount Model



Corrosion-resistant Board Coating for Environmental Requirement

All GP4000 Series products are available in coated models. (Except GP4100 Series, GP4000M Series and GP4000H Series)

Satisfies your desire to design

The customized overlay satisfies your design needs such as color, size, customized key sheet, anti-glare surface, and so on.

ex1: Blue overlay instead of a usual one  
ex2: Entire overlay including sheet keys  
ex3: Non-square overlay



Size	12.1"	10.4"	7.5"	5.7"
------	-------	-------	------	------

GP4000 Series Rear-mount Models are DC power and analog touch panel models only.

\*1: Backup for HMI \*2: For supported features, please refer to GP-Pro EX Reference Manual. \*3: GP-4114T/4104 only \*4: Excluding GP-4114T/4104  
\*5: Backup for Control

For detailed specifications, visit our website.  
<http://www.pro-face.com/product/hmi/gp4000/spec.html>



For further information, visit our website.  
<http://www.pro-face.com/product/soft/gpproex.html>

